





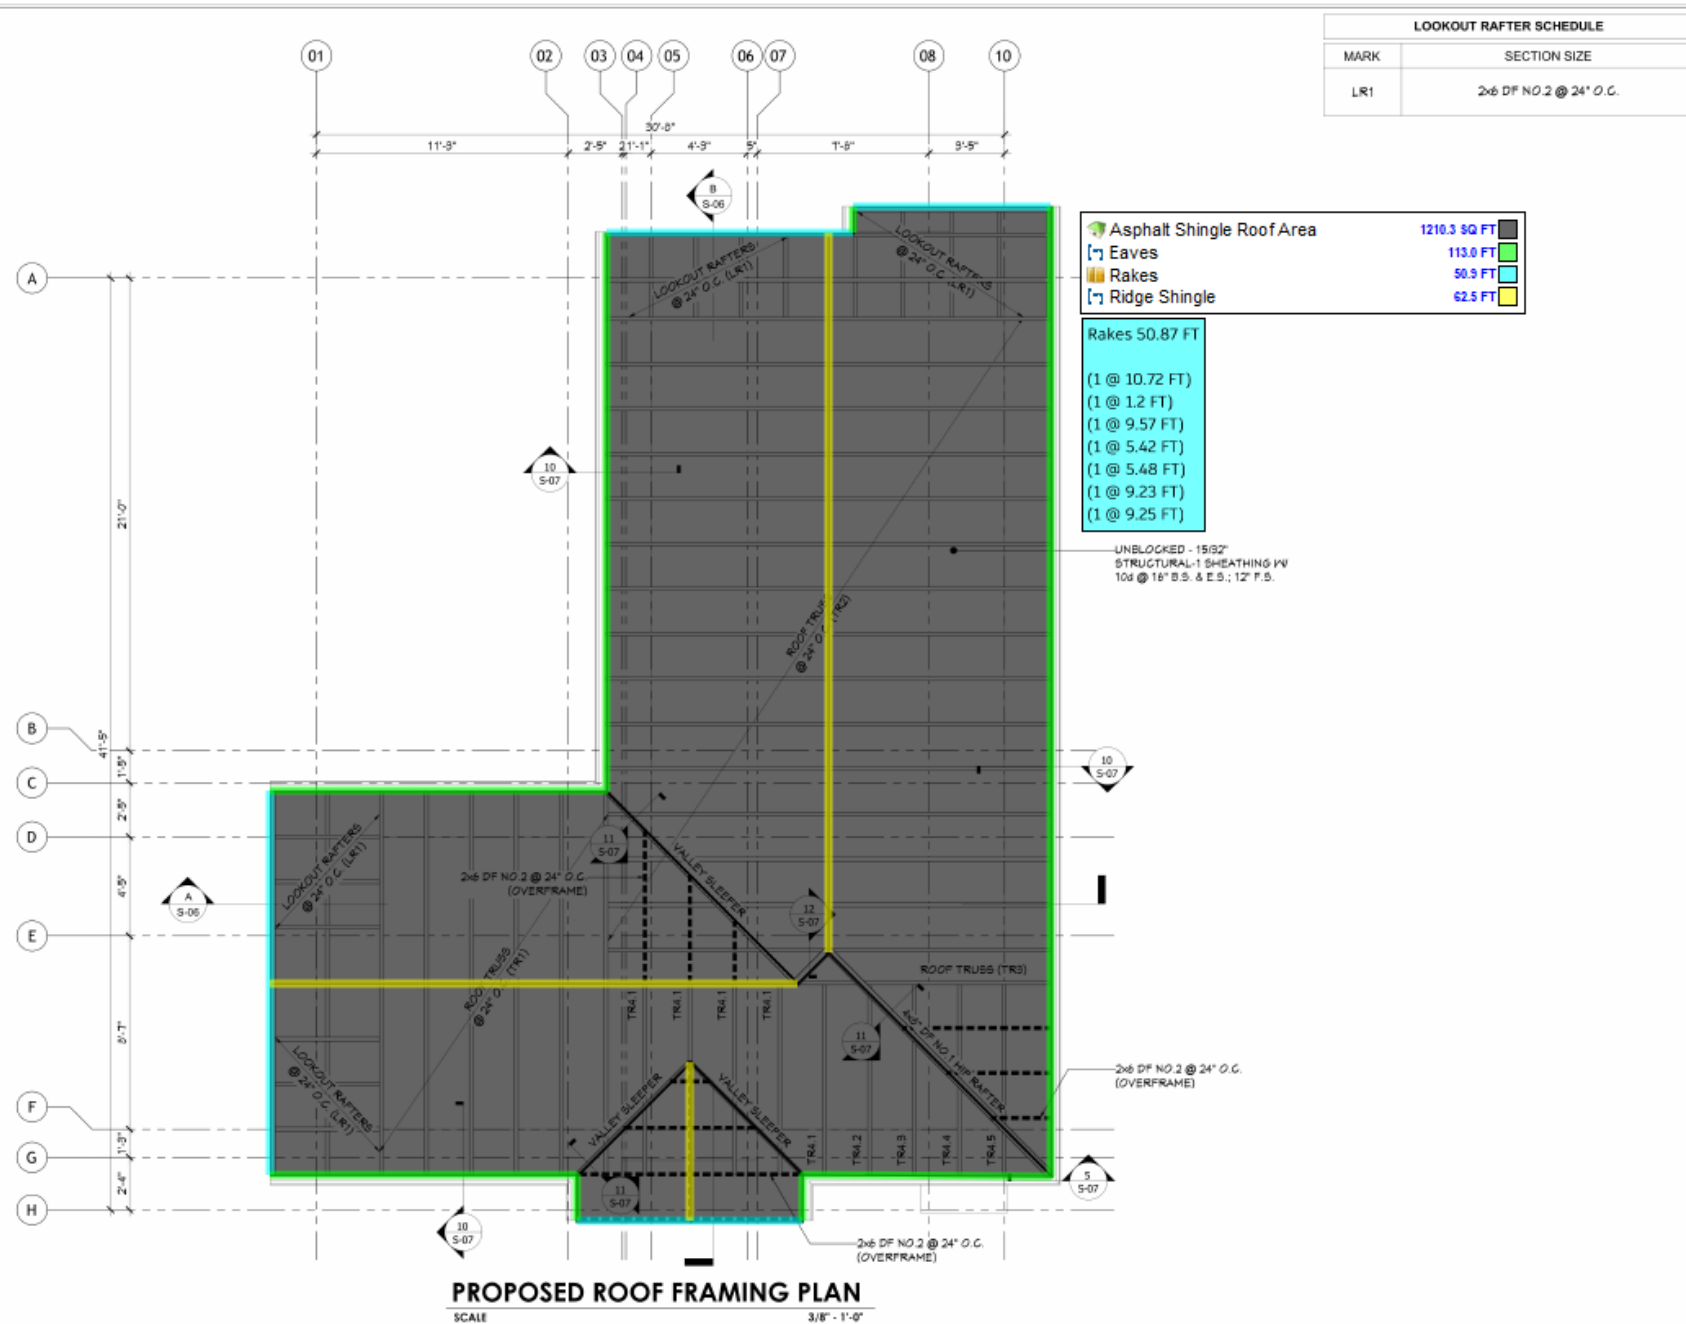

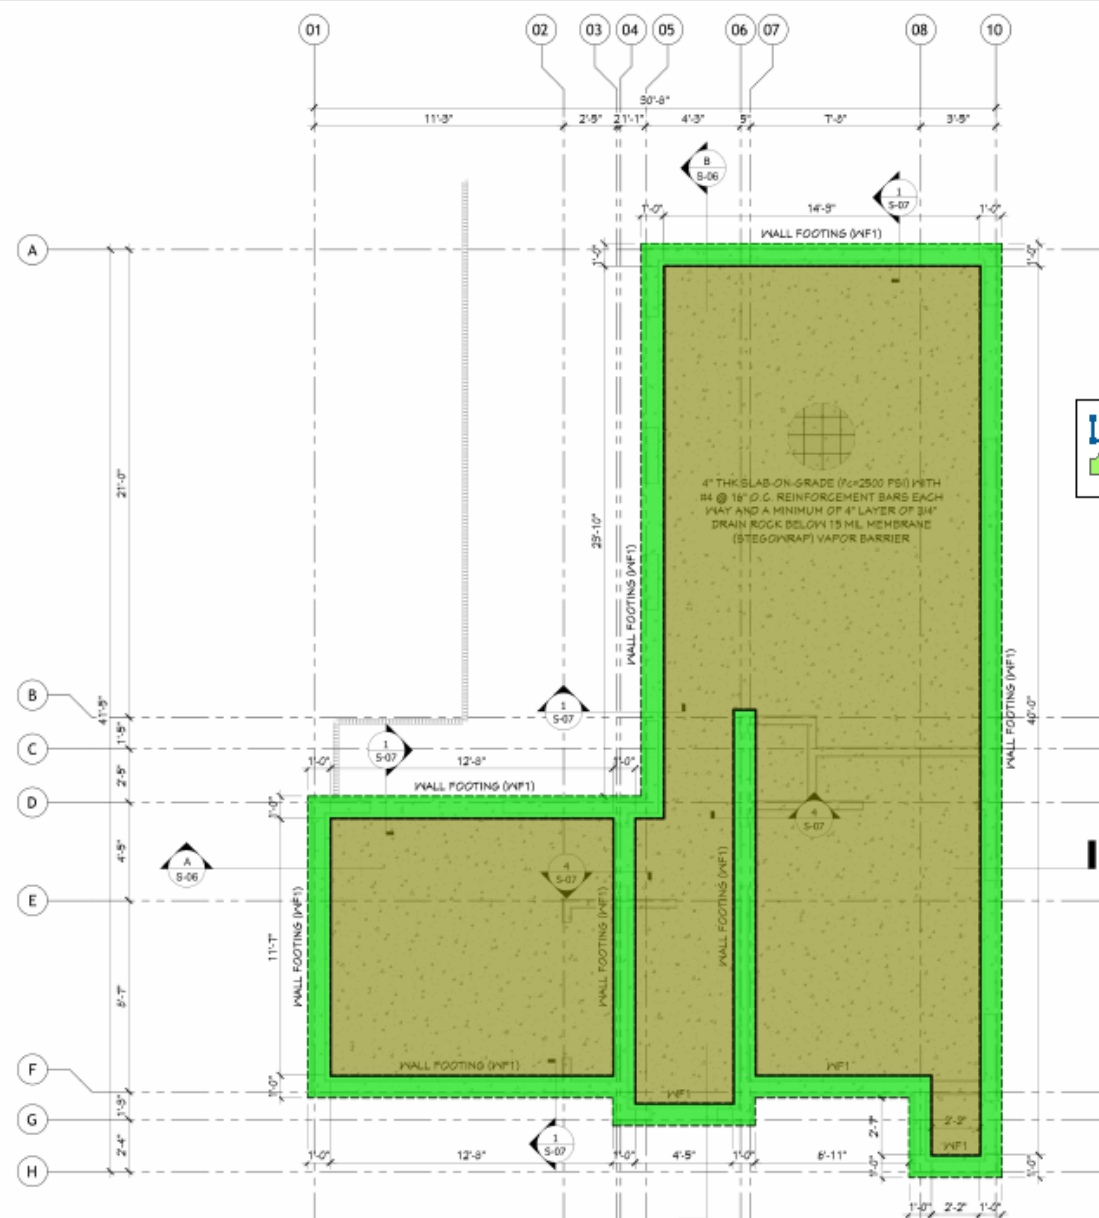

FOOTING SCHEDULE	
MARK	SECTION SIZE
WF1	12"(W) x 12"(D) WALL FOOTING W/ (2)-#5 TOP & BOTT. REINFORCEMENTS
PF1	18"(L) x 18"(W) x 12"(D) PAD FOOTING W/ (2)-#5 TOP & BOTT. BARS E.W.

WF-1


178.1 FT

Slab on Grade


728.4 SQ FT

PROPOSED FOUNDATION PLAN
 SCALE 3/8" = 1'-0"

HEADER SCHEDULE	
MARK	SECTION SIZE
H1	4x6 DFL NO.1

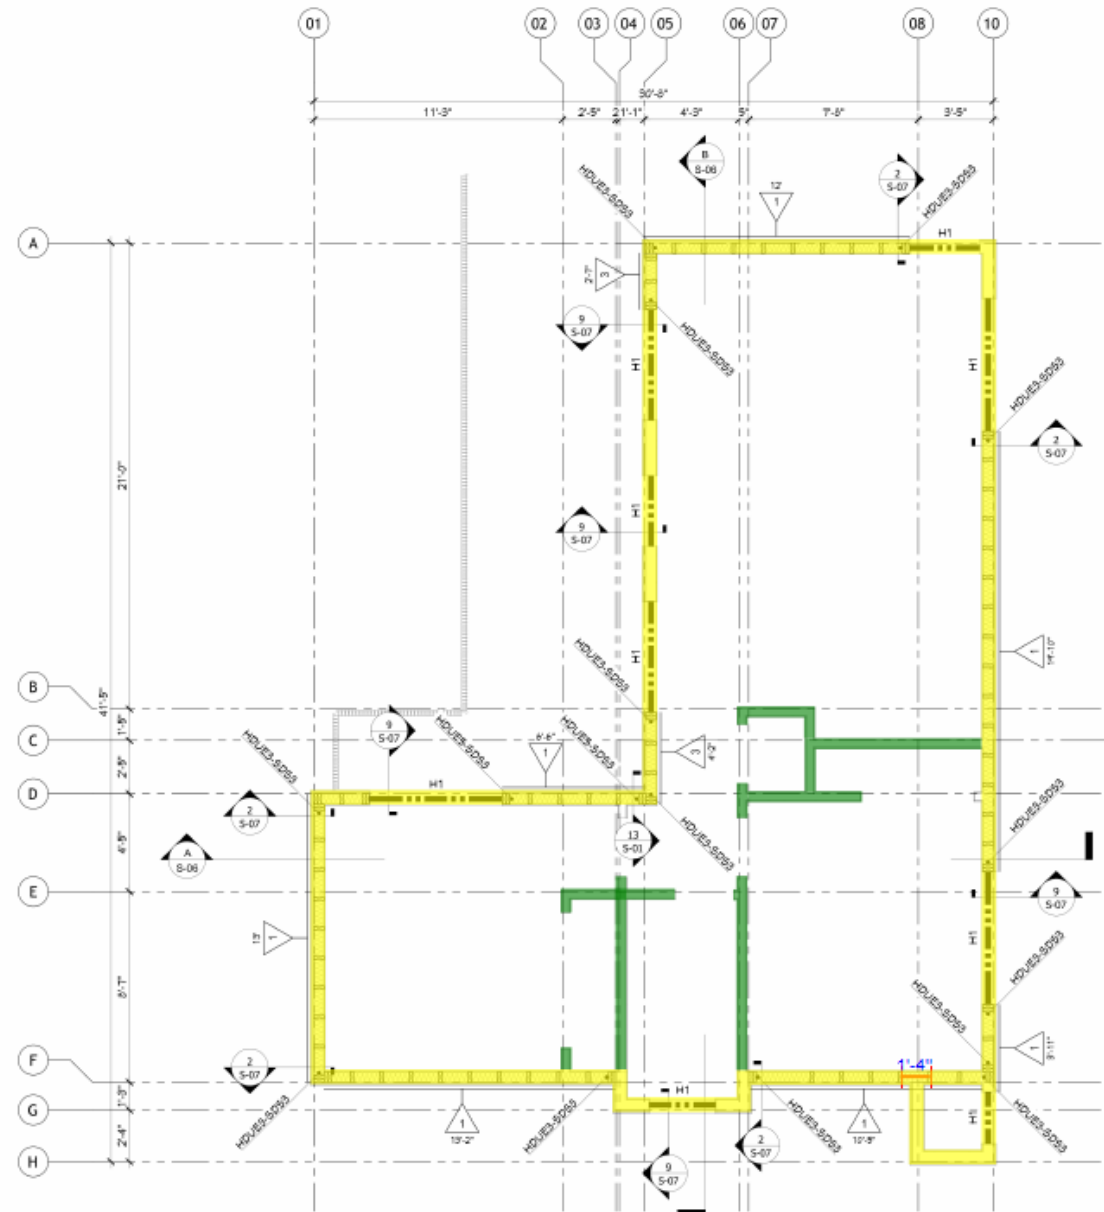

PROPOSED SHEARWALL LAYOUT PLAN
 SCALE 3/8" = 1'-0"

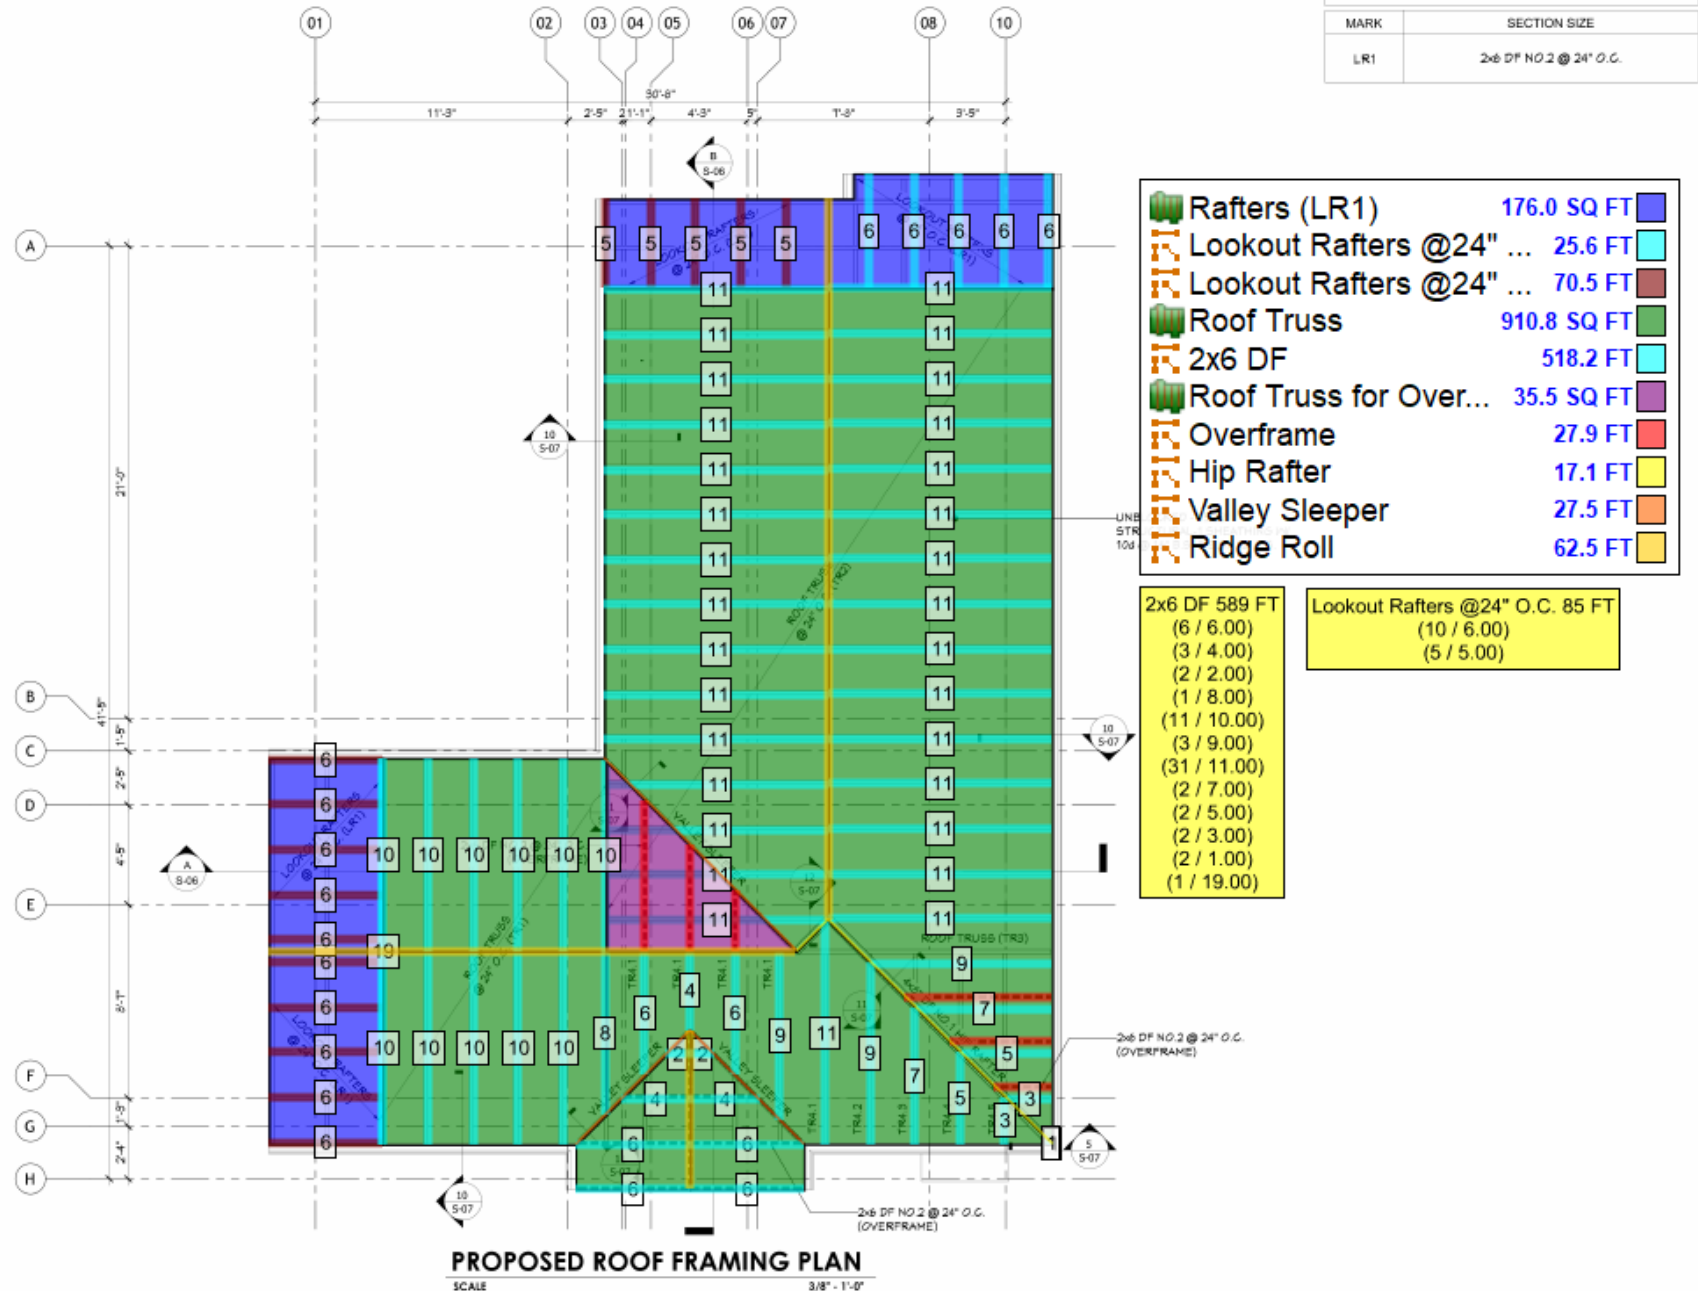

Name	Description	Qty	Units	Cost Each	Markup %	Price Each	Price Total	Color
DIVISION 3 - CONCRETE								
WF-1	12"(W) x 12"(D) Wall Footing w/(2) - #5 Top & Bottom Rein:	178.06	FT	\$0.00	0	\$0.00	\$0.00	
Concrete (Priced per CU YD)		6.59	CU YD	\$150.00	5	\$157.50	\$1037.92	
#5 Rebar (Priced per LBS)		371.43	LBS	\$1.00	5	\$1.05	\$390.00	
#5 Rebar (Priced per LBS)		278.57	LBS	\$1.00	5	\$1.05	\$292.50	
Concrete Labor (Priced per FT)		178.06	FT	\$5.00	5	\$5.25	\$934.82	
Slab on Grade		728.41	SQ FT	\$0.00	0	\$0.00	\$0.00	
Concrete Slab (Priced per CU YD)		8.99	CU YD	\$150.00	0	\$150.00	\$1348.50	
4" Layer of 3/4" Drain Rock		17.08	Tons	\$50.00	0	\$50.00	\$854.00	
Rebar (Priced per LBS)		729.87	LBS	\$1.00	0	\$1.00	\$729.87	
15 mil Vapor Barrier (Priced per ROLL)		0.37	Roll(s)	\$500.00	0	\$500.00	\$185.00	
Concrete Labor (Priced per SQ FT)		728.41	SQ FT	\$5.00	0	\$5.00	\$3642.05	
DIVISION 6.1 - ROUGH CARPENTRY								
Shearwall Exterior		165.47	FT	\$0.00	5	\$0.00	\$0.00	
2x8 104-5/8" Studs (priced EA)	16" OC Spacing,	164	EA	\$30.00	5	\$31.50	\$5166.00	
2x8x16' #2 DF (priced EA)	(2) - 16' Plate(s)	21	EA	\$25.00	5	\$26.25	\$551.25	
2x8x16' #2 DF (priced EA)	1 Bottom Plate(s)	11	EA	\$25.00	5	\$26.25	\$288.75	
7/16" 4'x8' OSB (priced EA)	4' x 8' Sheets	47	EA	\$15.00	5	\$15.75	\$740.25	
Framing Labor (priced per HR)	Sheathing, Studs and Plates	17	Hour(s)	\$3.00	5	\$3.15	\$53.55	
Shearwall Interior		47.77	FT	\$0.00	0	\$0.00	\$0.00	
2x6 104-5/8" Studs (priced EA)	16" OC Spacing,	102	EA	\$10.00	0	\$10.00	\$1020.00	
2x6x12' #2 DF (priced EA)	(2) - 12' Plate(s)	8	EA	\$15.00	0	\$15.00	\$120.00	
2x6x12' #2 DF (priced EA)	1 Bottom Plate(s)	4	EA	\$15.00	0	\$15.00	\$60.00	
1/2" 4'x8' OSB (priced EA)	4' x 8' Sheets	14	EA	\$15.00	0	\$15.00	\$210.00	
Framing Labor (priced per HR)	Sheathing, Studs and Plates	5	Hour(s)	\$3.00	0	\$3.00	\$15.00	

DIVISION 7.30 - ROOFING										
Rafters (LR 1)				175.98	SQ FT	\$0.00	0	\$0.00	\$0.00	
Lookout Rafters @24" O.C.				25.55	FT	\$0.00	0	\$0.00	\$0.00	
Lookout Rafters @24" O.C. @ 6'				5		\$5.00	0	\$5.00	\$25.00	
Lookout Rafters @24" O.C.				70.5	FT	\$0.00	0	\$0.00	\$0.00	
Lookout Rafters @24" O.C.				0						
Lookout Rafters @24" O.C. @ 5'				5		\$5.00	0	\$5.00	\$25.00	
Lookout Rafters @24" O.C. @ 6'				10		\$5.00	0	\$5.00	\$50.00	
Roof Truss for OverFrame				35.54	SQ FT	\$0.00	0	\$0.00	\$0.00	
Unblocked 15/32" OSB Sheathing (priced EA 4' x 8' Sheets				2	EA	\$20.00	5	\$21.00	\$42.00	
Overframe				27.89	FT	\$0.00	0	\$0.00	\$0.00	
Roof Truss				910.81	SQ FT	\$0.00	0	\$0.00	\$0.00	
2x6 DF				518.18	FT	\$10.00	0	\$10.00	\$5181.80	
Hip Rafter			4x8" DF No. 1 Hip Rafter	17.1	FT	\$3.00	0	\$3.00	\$51.30	
Valley Sleeper				27.56	FT	\$3.00	0	\$3.00	\$82.68	
Ridge Roll				62.49	FT	\$3.00	0	\$3.00	\$187.47	
Unblocked 15/32" OSB Sheathing (priced EA 4' x 8' Sheets				42	EA	\$20.00	5	\$21.00	\$882.00	
Asphalt Shingle Roof Area				1210.28	SQ FT	\$0.00	0	\$0.00	\$0.00	
30 Year Shingles (priced per Bundle)			3 Bundles per SQUARE	40	BNDLS	\$55.00	5	\$57.75	\$2310.00	
1-1/2" Galv. Roofing nails, 11 Ga			Per Bundle	42	EA	\$6.00	5	\$6.30	\$264.60	
#15 Asphalt Felt (priced per Roll)			3' x 144' Roll, covers 432 SQ FT	3	Roll(s)	\$40.00	5	\$42.00	\$126.00	
7/16" OSB Sheathing (priced EA)			4' x 8' Sheets	40	EA	\$25.00	5	\$26.25	\$1050.00	
Rakes				50.87	FT	\$0.00	0	\$0.00	\$0.00	
Beam Legend				0						
Ridge Shingle				62.54	FT	\$0.00	0	\$0.00	\$0.00	
Ridge/Hip Shingles (priced per Box)			48 shingles per box, 7-3/4" exposure per shingle	3	Box(s)	\$20.00	5	\$21.00	\$63.00	
Eaves				113	FT	\$0.00	0	\$0.00	\$0.00	
Drip Edge (priced per FT)			50 per box, 10' Lengths	135	FT	\$7.00	5	\$7.35	\$992.25	
Starter Shingles (priced per Bundle)			6 5/8" x 39 3/8", 120 FT per Bundle,	2	BNDLS	\$55.00	5	\$57.75	\$115.50	
						\$1,301.00	MAX=5.00	\$29088.06		