


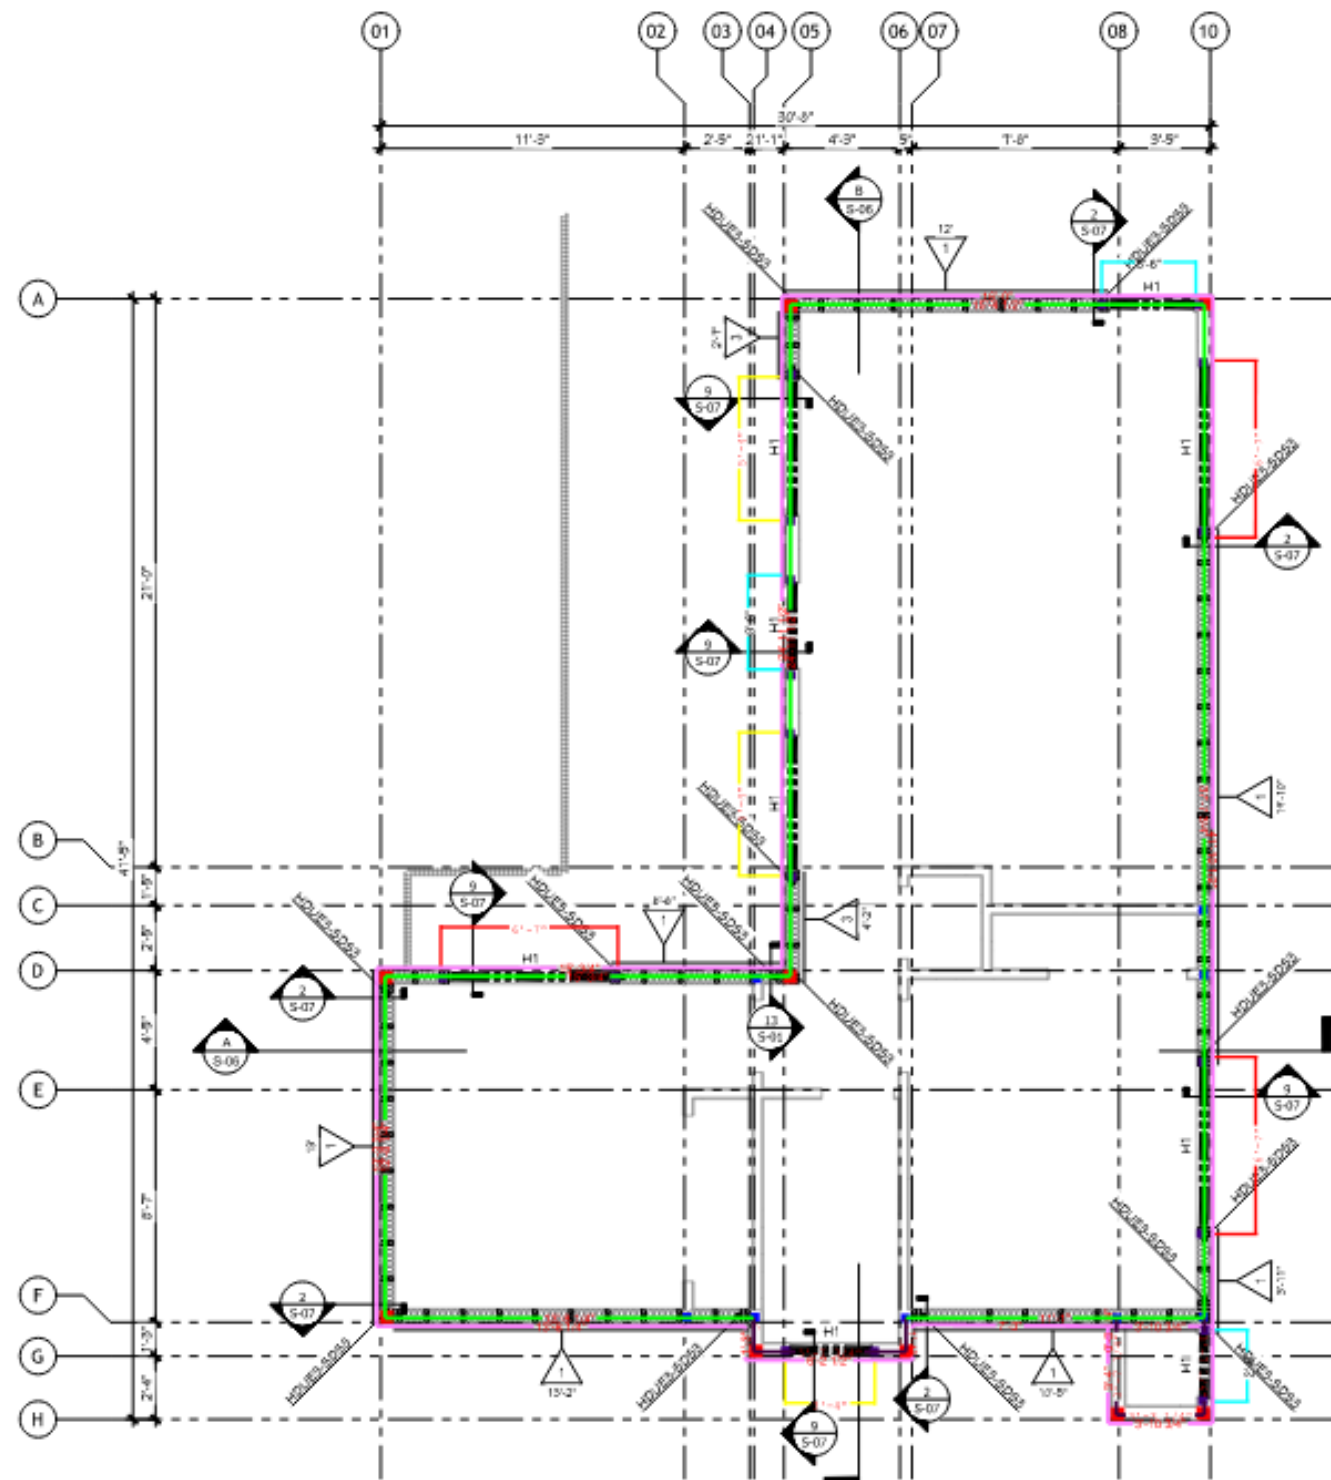

PROPOSED SHEARWALL LAYOUT PLAN

SCALE 3/8" = 1'-0"

Legend

Subject	Label	Quantity	Unit
 Framing	Exterior Wall - Corner Stud Pairs	9	Count
 Framing	Exterior Wall - Intersection Stud Pairs	8	Count
 Framing	Exterior Wall - Large Window Headers	19.7358	ft
 Framing	Exterior Wall - Non-Shearwall	18.6421	ft
 Framing	Exterior Wall - Shearwall	130.4945	ft
 Framing	Exterior Wall - Sheathing	152.3484	ft
 Framing	Exterior Wall - Small Door Headers	9.6666	ft
 Framing	Exterior Wall - Small Window Headers	13.9932	ft
 Framing	Exterior Wall Large Opening Stud Triple	6	Count
 Framing	Exterior Wall Small Opening Post	3	Count
 Framing	Exterior Wall Small Opening Stud Pair	9	Count

06 11 10 - FRAMING WITH LUMBER (WALLS)	Page	Detail	Count		Length		Width		Depth/Height		Area		Install/ Net Quantities
Exterior Non-Shearwalls, Main Level													
Plates, Sill (1x) and Top (2x) (Dimensional Lumber, 1.5" x 5.5" x 16', #2 SPF)	-	-	-	-	150	LF	-	-	-	-	-	-	450 LF
Studs at Spacing Requirement (Dimensional Lumber, 1.5" x 5.5" x 10', Stud Grade)	-	-	-	-	150	LF	-	-	-	-	-	-	113 EA
Studs (2x) at Corners	-	-	9	EA	-	-	-	-	-	-	-	-	18 EA
Studs (2x) at Intersections	-	-	8	EA	-	-	-	-	-	-	-	-	16 EA
Studs (4x) at Small (< 6') Openings	-	-	12	EA	-	-	-	-	-	-	-	-	24 EA
Studs (6x) Large (>= 6') Openings	-	-	6	EA	-	-	-	-	-	-	-	-	18 EA
Studs (1x) at Holddowns (If Any)	-	-		EA	-	-	-	-	-	-	-	-	EA
Blocking (1.5" x 5.5" x 8', Exclude Openings)	-	-	-	-	106	LF	-	-	-	-	-	-	13 EA
Bracing (10ft Studs Every 20 ft, 1.5" x 5.5" x 10' stud grade)	-	-	-	-	150	LF	-	-	-	-	-	-	8 EA
Wall Framing Installation (\$/SF of Wall Area)	-	-	-	-	150	LF	-	-	9	LF	-	-	1350 SF
Headers (2x) at Small (< 6') Doors (Add 2" + 3" for Jamb & Jack Stud, 1.5" x 11.25" x 8', #2 SPF)	-	-	-	-	10	LF	-	-	-	-	-	-	20 LF
Headers (2x) at Small (>= 6') Doors (Add 2" + 6" for Jamb & Jack Stud)	-	-	-	-		LF	-	-	-	-	-	-	0 LF
Headers (2x) at Small (< 6') Windows (Add 1" + 3" for Drywall & Jack Stud)	-	-	-	-	14	LF	-	-	-	-	-	-	28 LF
Headers (2x) at Small (>= 6') Windows (Add 1" + 6" for Drywall & Double Jack Stud)	-	-	-	-	20	LF	-	-	-	-	-	-	40 LF
Spacers (7/16" x 4' x 8' OSB)	-	-	-	-	-	-	-	-	-	-	-	-	88 SF
Openings & Headers Installation (\$/EA Opening)	-	-	9	EA	-	-	-	-	-	-	-	-	9 EA
Sheathing (7/16" x 4' x 8' OSB)	-	-	-	-	-	-	-	-	-	-	-	-	1285 SF
Sheathing Installation (\$/SF of Sheathing Area)	-	-	-	-	-	-	-	-	-	-	-	-	40.15625 EA
Connections + Hardware Allowance (\$/SF of Wall Area)	-	-	-	-	150	LF	-	-	9	LF	-	-	1350 SF

Waste	Order/Gross Quantities	Conversion	Productivity Rate	Labor Hour	Unit Cost	Bare Cost
5%	30 EA	LF TO EA			20 \$/EA	\$600.00
5%	120 EA	LF TO EA			10 \$/EA	\$1,200.00
5%	20 EA	LF TO EA			10 \$/EA	\$200.00
5%	18 EA	LF TO EA			10 \$/EA	\$180.00
5%	27 EA	LF TO EA			10 \$/EA	\$270.00
5%	20 EA	LF TO EA			10 \$/EA	\$200.00
5%	EA	LF TO EA			10 \$/EA	-
5%	15 EA	LF TO EA			10 \$/EA	\$150.00
5%	10 EA	LF TO EA			12 \$/EA	\$120.00
			10 SF/HR	135	50 \$/HR	\$6,750.00
5%	3 EA	LF TO EA			15 \$/EA	\$45.00
5%	EA	LF TO EA			15 \$/EA	-
5%	4 EA	LF TO EA			15 \$/EA	\$60.00
5%	5 EA	LF TO EA			15 \$/EA	\$75.00
10%	5 EA	SF TO EA			20 \$/EA	\$100.00
			1.25 EA/HR	7.2	50 \$/HR	\$360.00
10%	46 EA	SF TO EA			20 \$/EA	\$920.00
			2 EA/HR	20.078125	50 \$/HR	\$1,003.91
	1350 SF				1 \$/EA	\$1,350.00

Estimate Summary	Order Quantity		Labor Hour	Cost
Material				
Plate (1.5" x 5.5" x 16')	30	EA	-	\$600.00
Stud (1.5" x 5.5" x 10')	205	EA	-	\$2,050.00
Blocking (1.5" x 5.5" x 8')	15	EA	-	\$150.00
Bracing (1.5" x 5.5" x 10')	10	EA	-	\$120.00
Headers (1.5" x 11.25" x 8')	12	EA	-	\$180.00
Spacers (7/16" x 4' x 8')	5	EA	-	\$100.00
Sheathing (7/16" x 4' x 8')	46	EA	-	\$920.00
Hardware				\$2,700.00
Labor				
Installation			162.28 HR	\$8,113.91
Markups				
Material Cost After Markup (10%)				\$7,502.00
Labor Cost After Markup (10%)				\$10,548.08
Overhead & Profit				
Subcontractor Overhead and Profit (20%)**				\$3,610.02
Total				\$21,660.09