


ELEVATIONS

Exterior Painting - Sage Green	72.3 SQ FT
Exterior Painting - Bone White Color	3245.6 SQ FT
Corning Bead - Bone White Color	790.2 FT
Corning Bead - Sage Green	231.3 FT




EAST

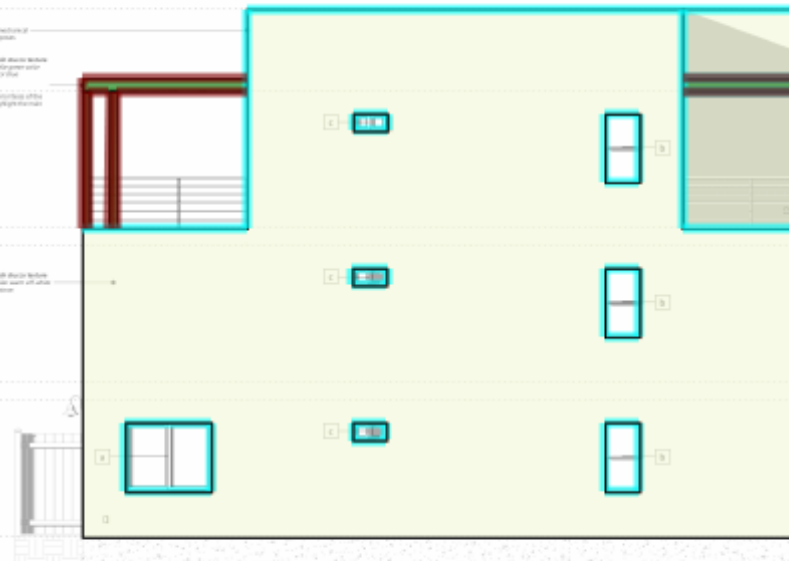

NORTH



WEST

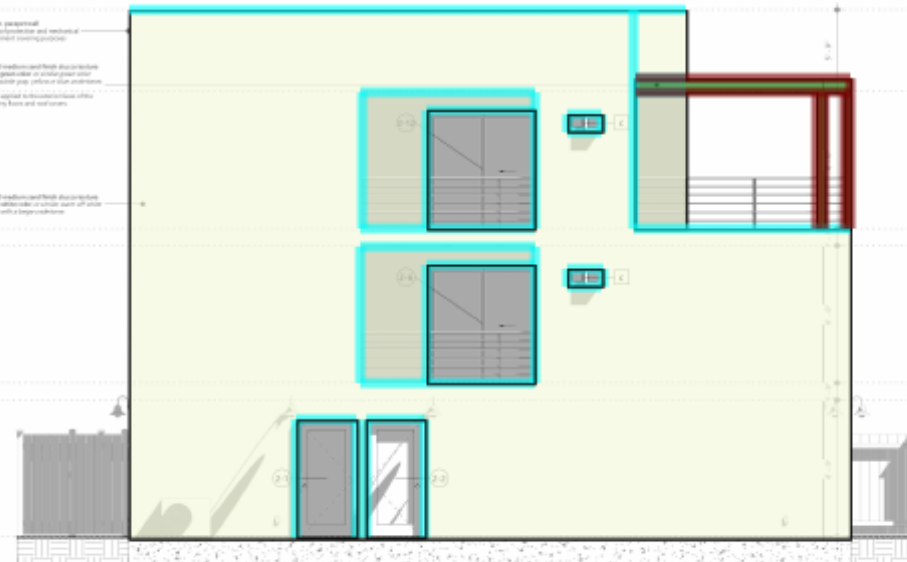

SOUTH PROPOSED | ACCESSORY DWELLING UNIT

scale - 1/4" = 1'-0"

20/30 medium sand finish stucco texture
sage green color *or similar green color
with subtle gray, yellow or blue
undertones.*

to be applied to the exterior faces of the
balcony floors and to highlight the main
entrance.

20/30 medium sand finish stucco texture
bone white color *or similar warm off-white
color with a beige undertone.*



09 24 23 - PORTLAND CEMENT STUCCO	Count	Length	Width	Depth/Height	Area	Install/ Net Quantities	Waste	Order/Gross Quantities	Conversion	Productivity Rate	Labor Hour	Unit Cost	Bare Cost		
Proposed Accessory Dwelling Unit															
Exterior - 20/30 medium sand finish stucco texture sage green color															
Stucco Base/Brown Coat 3/8" (80lb bag)	-	-	-	-	-	72.3	SQ.FT	5%	5	bags	SQ. FT TO bags	17	\$/bag	\$85.00	
Finish Coat 3/8" (80lb bag)	-	-	-	-	-	72.3	SQ.FT	5%	5	bags	SQ. FT TO bags	25	\$/bag	\$125.00	
20/30 medium sand (80lb bag)	-	-	-	-	-	72.3	SQ.FT	5%	2	bags	SQ. FT TO bags	7.5	\$/bag	\$15.00	
Hydrated Lime (50lb bag)	-	-	-	-	-	72.3	SQ.FT	15%	3	bags	SQ. FT TO bags	14	\$/bag	\$42.00	
Portland Cement Coat (94lb bag)	-	-	-	-	-	72.3	SQ.FT	15%	4	bags	SQ. FT TO bags	16	\$/bag	\$64.00	
Bonding Agent/Primer	-	-	-	-	-	72.3	SQ.FT	20%	3	bags	SQ. FT TO bags	35	\$/bag	\$105.00	
Fiberglass Stucco Mesh (3ft x 150ft)	-	-	-	-	-	72.3	SQ.FT	20%	2	rolls	SQ. FT TO rolls	90	\$/roll	\$180.00	
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	-	-	231.4	LF	-	-	EA	10%	34	EA		0.5	\$/EA	\$17.00	
Stucco Color Pigment (Sage Green)	-	-	-	-	-	72.3	SQ.FT	5%	2	gals	LFTO gal	50	\$/gal	\$100.00	
Water	5	bags	-	-	-	-	bags	20%	10	gals	bags to gal	0.03	\$/gal	\$0.30	
3/8" Sealant Bead per cartridge	-	-	231.4	LF	-	-	EA	20%	4	catridge	LFTO catridge	9	\$/catridge	\$36.00	
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	-	-	-	-	-	72.3	SQ.FT	10%	2	rolls	LFTO rolls	120	\$/roll	\$240.00	
Silane/Sixolane Penetrating Sealers	-	-	-	-	-	72.3	SQ.FT	5%	2	gals	LFTO gal	40	\$/gal	\$80.00	
Labor Cost	-	-	-	-	-	-	-								
Surface Preparation	-	-	-	-	-	72.3	SQ.FT				1.45	MH	35	\$/MH	\$50.75
Minor Patching	-	-	-	-	-	72.3	SQ.FT				1.08	MH	35	\$/MH	\$37.80
Masking/Protection	-	-	-	-	-	72.3	SQ.FT				0.72	MH	35	\$/MH	\$25.20
Primer/Sealer	-	-	-	-	-	72.3	SQ.FT				0.72	MH	35	\$/MH	\$25.20
1st paint coat	-	-	-	-	-	72.3	SQ.FT				1.08	MH	35	\$/MH	\$37.80
2nd paint coat	-	-	-	-	-	72.3	SQ.FT				0.87	MH	35	\$/MH	\$30.45
Clean-Up	-	-	-	-	-	72.3	SQ.FT				0.72	MH	35	\$/MH	\$25.20
Exterior - 20/30 medium sand finish stucco texture bone white color															
Stucco Base/Brown Coat 3/8" (80lb bag)	-	-	-	-	-	3245.6	SQ.FT	5%	172	bags	SQ. FT TO bags	17	\$/bag	\$2,924.00	
Finish Coat 3/8" (80lb bag)	-	-	-	-	-	3245.6	SQ.FT	5%	172	bags	SQ. FT TO bags	25	\$/bag	\$4,300.00	
20/30 medium sand (80lb bag)	-	-	-	-	-	3245.6	SQ.FT	5%	44	bags	SQ. FT TO bags	7.5	\$/bag	\$330.00	
Hydrated Lime (50lb bag)	-	-	-	-	-	3245.6	SQ.FT	15%	55	bags	SQ. FT TO bags	14	\$/bag	\$770.00	
Portland Cement Coat (94lb bag)	-	-	-	-	-	3245.6	SQ.FT	15%	95	bags	SQ. FT TO bags	16	\$/bag	\$1,520.00	
Bonding Agent/Primer	-	-	-	-	-	3245.6	SQ.FT	20%	50	bags	SQ. FT TO bags	35	\$/bag	\$1,750.00	
Fiberglass Stucco Mesh (3ft x 150ft)	-	-	-	-	-	3245.6	SQ.FT	20%	10	rolls	SQ. FT TO rolls	90	\$/roll	\$900.00	
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	-	-	790.2	LF	-	-	EA	10%	111	EA		0.5	\$/EA	\$55.50	
Stucco Color Pigment (Sage Green)	-	-	-	-	-	3245.6	SQ.FT	5%	19	gals	LFTO gal	50	\$/gal	\$950.00	
Water	172	bags	-	-	-	-	bags	20%	285	gals	bags to gal	0.03	\$/gal	\$8.55	
3/8" Sealant Bead per cartridge	-	-	790.2	LF	-	-	EA	20%	11	catridge	LFTO catridge	9	\$/catridge	\$99.00	
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	-	-	-	-	-	3245.6	SQ.FT	10%	9	rolls	LFTO rolls	120	\$/roll	\$1,080.00	
Silane/Sixolane Penetrating Sealers	-	-	-	-	-	3245.6	SQ.FT	5%	24	gals	LFTO gal	40	\$/gal	\$960.00	
Labor Cost	-	-	-	-	-	-	-								
Surface Preparation	-	-	-	-	-	3245.6	SQ.FT				64.91	MH	35	\$/MH	\$2,271.85
Minor Patching	-	-	-	-	-	3245.6	SQ.FT				48.68	MH	35	\$/MH	\$1,703.80
Masking/Protection	-	-	-	-	-	3245.6	SQ.FT				32.46	MH	35	\$/MH	\$1,136.10
Primer/Sealer	-	-	-	-	-	3245.6	SQ.FT				32.46	MH	35	\$/MH	\$1,136.10
1st paint coat	-	-	-	-	-	3245.6	SQ.FT				48.68	MH	35	\$/MH	\$1,703.80
2nd paint coat	-	-	-	-	-	3245.6	SQ.FT				38.95	MH	35	\$/MH	\$1,363.25
Clean-Up	-	-	-	-	-	3245.6	SQ.FT				32.46	MH	35	\$/MH	\$1,136.10

Estimate Summary	Order Quantity		Labor Hour	Cost
Material				
Stucco Base/Brown Coat 3/8" (80lb bag)	177	bags	-	\$3,009.00
Finish Coat 3/8" (80lb bag)	177	bags	-	\$4,425.00
20/30 medium sand (80lb bag)	46	bags	-	\$345.00
Hydrated Lime (50lb bag)	58	bags	-	\$812.00
Portland Cement Coat (94lb bag)	99	bags	-	\$1,584.00
Bonding Agent/Primer	53	bags	-	\$1,855.00
Fiberglass Stucco Mesh (3ft x 150ft)	12	rolls	-	\$1,080.00
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	145	EA		\$72.50
Stucco Color Pigment (Sage Green)	21	gals		\$1,050.00
Water	295	gals		\$8.85
3/8" Sealant Bead per cartridge	15	cartridge		\$135.00
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	11	rolls		\$1,320.00
Silane/Sixolane Penetrating Sealers	26	gals		\$1,040.00
Labor				
Installation			305.24 MH	\$10,683.40
Markups				
Material Cost After Markup (10%)				\$18,409.99
Labor Cost After Markup (10%)				\$13,888.42
Overhead & Profit				
Subcontractor Overhead and Profit (20%)**				\$6,459.68
Total				\$38,758.09