

ELEVATIONS

Exterior Painting - Bone White Color	4142.1 SQ FT	
Exterior Painting - Sage Green	84.0 SQ FT	
Corner Beads - Bone White Color	934.1 FT	
Corner Beads - Sage Green Color	42.8 FT	




EAST



NORTH



WEST

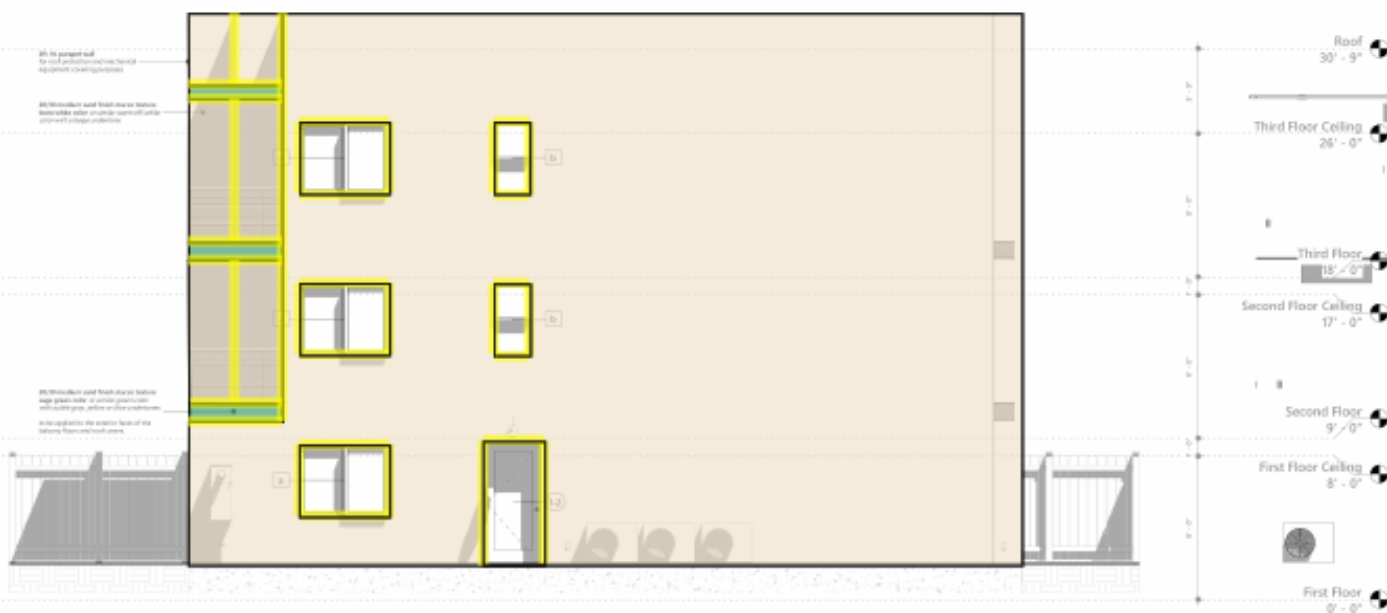


SOUTH

PROPOSED | MAIN RESIDENCE


scale - 1/4" = 1'-0"

20/30 medium sand finish stucco texture
bone white color *or similar warm off-white
color with a beige undertone.*

a

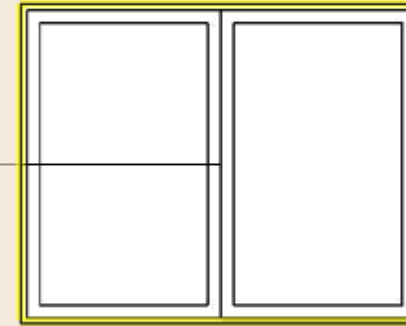

a

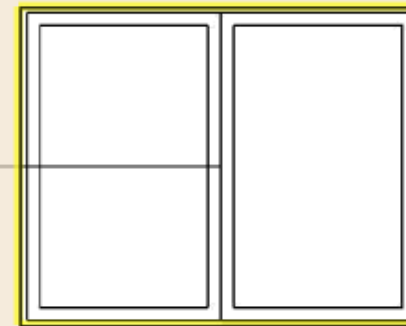

20/30 medium sand finish stucco texture
sage green color *or similar green color
with subtle gray, yellow or blue undertones.*

- to be applied to the exterior faces of the balcony floors and roof covers and, to highlight the main entrance.



09 24 23 - PORTLAND CEMENT STUCCO	Count	Length	Width	Depth/Height	Area	Install/ Net Quantities	Waste	Order/Gross Quantities	Conversion	Productivity Rate	Labor Hour	Unit Cost	Bare Cost
Proposed Main Residence													
Exterior - 20/30 medium sand finish stucco texture sage green color													
Stucco Base/Brown Coat 3/8" (80lb bag)	-	-	-	-	-	-	-	72.3 SQ.FT 5%	5 bags SQ. FT TO bags			17 \$/bag	\$85.00
Finish Coat 3/8" (80lb bag)	-	-	-	-	-	-	-	72.3 SQ.FT 5%	5 bags SQ. FT TO bags			25 \$/bag	\$125.00
20/30 medium sand (80lb bag)	-	-	-	-	-	-	-	72.3 SQ.FT 5%	2 bags SQ. FT TO bags			7.5 \$/bag	\$15.00
Hydrated Lime (50lb bag)	-	-	-	-	-	-	-	72.3 SQ.FT 15%	3 bags SQ. FT TO bags			14 \$/bag	\$42.00
Portland Cement Coat (94lb bag)	-	-	-	-	-	-	-	72.3 SQ.FT 15%	4 bags SQ. FT TO bags			16 \$/bag	\$64.00
Bonding Agent/Primer	-	-	-	-	-	-	-	72.3 SQ.FT 20%	3 bags SQ. FT TO bags			35 \$/bag	\$105.00
Fiberglass Stucco Mesh (3ft x 150ft)	-	-	-	-	-	-	-	72.3 SQ.FT 20%	2 rolls SQ. FT TO rolls			90 \$/roll	\$180.00
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	-	-	231.4	LF	-	-	-	30 EA 10%	34 EA			0.5 \$/EA	\$17.00
Stucco Color Pigment (Sage Green)	-	-	-	-	-	-	-	72.3 SQ.FT 5%	2 gals LF TO gal			50 \$/gal	\$100.00
Water	5	bags	-	-	-	-	-	5 bags 20%	10 gals bags to gal			0.03 \$/gal	\$0.30
3/8" Sealant Bead per cartridge	-	-	231.4	LF	-	-	-	30 EA 20%	4 cartridge LF TO cartridge			9 \$/cartridge	\$36.00
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	-	-	-	-	-	-	-	72.3 SQ.FT 10%	2 rolls LF TO rolls			120 \$/roll	\$240.00
Silane/Sixolane Penetrating Sealers	-	-	-	-	-	-	-	72.3 SQ.FT 5%	2 gals LF TO gal			40 \$/gal	\$80.00
Labor Cost	-	-	-	-	-	-	-						
Surface Preparation	-	-	-	-	-	-	-			1.45 MH		35 \$/MH	\$50.75
Minor Patching	-	-	-	-	-	-	-			1.08 MH		35 \$/MH	\$37.80
Masking/Protection	-	-	-	-	-	-	-			0.72 MH		35 \$/MH	\$25.20
Primer/Sealer	-	-	-	-	-	-	-			0.72 MH		35 \$/MH	\$25.20
1st paint coat	-	-	-	-	-	-	-			1.08 MH		35 \$/MH	\$37.80
2nd paint coat	-	-	-	-	-	-	-			0.87 MH		35 \$/MH	\$30.45
Clean-Up	-	-	-	-	-	-	-			0.72 MH		35 \$/MH	\$25.20
Exterior - 20/30 medium sand finish stucco texture bone white color													
Stucco Base/Brown Coat 3/8" (80lb bag)	-	-	-	-	-	-	-	4053.9 SQ.FT 5%	214 bags SQ. FT TO bags			17 \$/bag	\$3,638.00
Finish Coat 3/8" (80lb bag)	-	-	-	-	-	-	-	4053.9 SQ.FT 5%	214 bags SQ. FT TO bags			25 \$/bag	\$5,350.00
20/30 medium sand (80lb bag)	-	-	-	-	-	-	-	4053.9 SQ.FT 5%	55 bags SQ. FT TO bags			7.5 \$/bag	\$412.50
Hydrated Lime (50lb bag)	-	-	-	-	-	-	-	4053.9 SQ.FT 15%	68 bags SQ. FT TO bags			14 \$/bag	\$952.00
Portland Cement Coat (94lb bag)	-	-	-	-	-	-	-	4053.9 SQ.FT 15%	118 bags SQ. FT TO bags			16 \$/bag	\$1,888.00
Bonding Agent/Primer	-	-	-	-	-	-	-	4053.9 SQ.FT 20%	62 bags SQ. FT TO bags			35 \$/bag	\$2,170.00
Fiberglass Stucco Mesh (3ft x 150ft)	-	-	-	-	-	-	-	4053.9 SQ.FT 20%	12 rolls SQ. FT TO rolls			90 \$/roll	\$1,080.00
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	-	-	790.2	LF	-	-	-	100 EA 10%	111 EA			0.5 \$/EA	\$55.50
Stucco Color Pigment (Sage Green)	-	-	-	-	-	-	-	4053.9 SQ.FT 5%	23 gals LF TO gal			50 \$/gal	\$1,150.00
Water	214	bags	-	-	-	-	-	214 bags 20%	355 gals bags to gal			0.03 \$/gal	\$10.65
3/8" Sealant Bead per cartridge	-	-	790.2	LF	-	-	-	100 EA 20%	11 cartridge LF TO cartridge			9 \$/cartridge	\$99.00
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	-	-	-	-	-	-	-	4053.9 SQ.FT 10%	11 rolls LF TO rolls			120 \$/roll	\$1,320.00
Silane/Sixolane Penetrating Sealers	-	-	-	-	-	-	-	4053.9 SQ.FT 5%	30 gals LF TO gal			40 \$/gal	\$1,200.00
Labor Cost	-	-	-	-	-	-	-						
Surface Preparation	-	-	-	-	-	-	-			81.08 MH		35 \$/MH	\$2,837.80
Minor Patching	-	-	-	-	-	-	-			60.81 MH		35 \$/MH	\$2,128.35
Masking/Protection	-	-	-	-	-	-	-			40.54 MH		35 \$/MH	\$1,418.90
Primer/Sealer	-	-	-	-	-	-	-			40.54 MH		35 \$/MH	\$1,418.90
1st paint coat	-	-	-	-	-	-	-			60.81 MH		35 \$/MH	\$2,128.35
2nd paint coat	-	-	-	-	-	-	-			48.65 MH		35 \$/MH	\$1,702.75
Clean-Up	-	-	-	-	-	-	-			40.54 MH		35 \$/MH	\$1,418.90

Estimate Summary	Order Quantity		Labor Hour	Cost
Material				
Stucco Base/Brown Coat 3/8" (80lb bag)	219	bags	-	\$3,723.00
Finish Coat 3/8" (80lb bag)	219	bags	-	\$5,475.00
20/30 medium sand (80lb bag)	57	bags	-	\$427.50
Hydrated Lime (50lb bag)	71	bags	-	\$994.00
Portland Cement Coat (94lb bag)	122	bags	-	\$1,952.00
Bonding Agent/Primer	65	bags	-	\$2,275.00
Fiberglass Stucco Mesh (3ft x 150ft)	14	rolls	-	\$1,260.00
Zinc Coated Galvanized Corner Beads (2.5" x 2.5" x 8ft)	145	EA		\$72.50
Stucco Color Pigment (Sage Green)	25	gals		\$1,250.00
Water	365	gals		\$10.95
3/8" Sealant Bead per cartridge	15	cartridge		\$135.00
Standard Wire Lath (17-gauge, 3 coat) 36" x 150 ft	13	rolls		\$1,560.00
Silane/Sixolane Penetrating Sealers	32	gals		\$1,280.00
Labor				
Installation			379.61 MH	\$13,286.35
Markups				
Material Cost After Markup (10%)				\$22,456.45
Labor Cost After Markup (10%)				\$17,272.26
Overhead & Profit				
Subcontractor Overhead and Profit (20%)**				\$7,945.74
Total				\$47,674.44